WAXIE SANITARY SUPPLY

The Most Trusted Name In Clean. Since 1945.

WAXIE VERSA II

Operator and Parts Manual

Corporate Headquarters | 9353 Waxie Way | San Diego, CA 92123 | (800) 995-4466 | **www.waxie.com**

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

Revision Sheet

Release No.	Date	Revision Description
101413	10/14/13	Operator & Parts Manual Released
121713	12/17/13	Modified Rotomold Warranty to 5 years.

NOTE: Specifications and parts are subject to change without notice

Kaivac, Inc.

401 S. Third Street

Hamilton, OH 45011

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

Page #

1.0 GETTING STARTED 1-1

1.1 Limited Warranty Protection Plan 1-1

1.2 Warranty Registration Form 1-2

1.3 Safety Precautions 1-3

2.0 OPERATION 2-1

2.1 Out-of-Box Setup Instructions 2-1

2.2 WAXIE VERSA II Tool Arrangement 2-2

2.3 Preparing Your WAXIE VERSA II For Use 2-3

2.4 1200 Series Vac Tank Horn Operation 2-4

2.5 Operating your WAXIE VERSA II using S-I-M-P-L-E Process 2-5

3.0 MAINTENANCE 3-1

3.1 Maintenance 3-1

3.2 Squeegee Head Maintenance 3-2

3.3 Black Box Removal Instructions 3-3

3.4 Troubleshooting 3-4

3.5 Machine Diagrams 3-7

3.6 Parts List 3-19

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

1.0 GETTING STARTED

1.1 Limited Warranty Protection Plan

The WAXIE VERSA II has been engineered and tested to provide long lasting performance. This warranty covers defects in workmanship or materials under normal use and service from the date of purchase.

Kaivac, Inc. warrants the following components to be free from defects in materials and workmanship for these time periods:

1.) Extended Warranty for end users who use only Kaivac chemicals for the life of the machine.

- 5 years on rotationally molded parts
- 3 years on other parts (excluding wear items)
- 1 year on labor

2.) Standard Warranty (for approved non-Kaivac chemicals)

- 1 year parts and labor

3.) Chemicals that have not been approved by Kaivac (If uncertain, please contact Kaivac to verify your chemical before using).

- No warranty

All WAXIE VERSA II replacement parts are guaranteed for 90 days from the date of installation. Normal wear items such as wheels, hoses, seals, gaskets, cords, casters, squeegees and GFCI are excluded from warranty coverage.

All warranty claims must be accompanied by a Return Authorization Number (RAN), which is available by calling the Kaivac, Inc. Customer Service Department. No returns will be accepted without a RAN.

This warranty does not apply to return freight costs, damage or defect caused by accident, negligence, misuse, fire or repair done by anyone other than a Kaivac authorized repair center. In no event shall Kaivac, Inc. be liable for incidental or consequential damages, or any damages to persons or property.

Please Note: Under no circumstances will the seller be liable for any loss, damage, expenses or consequential damages arising in connection with the use or inability to use seller's product. Kaivac, Inc. reserves the right to make changes or improvements to its equipment without notice. Some states do not allow the exclusion or limitation of incidental or consequential damages. This warranty is in lieu of any other warranty expressed or implied, including any warranty of merchantability or fitness for a particular purpose.

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

1.2 WARRANTY REGISTRATION FORM

To be completed and mailed or faxed by the customer purchasing equipment. Return this warranty card within ten days of purchase.

Purchased By:

Name: _____ Title: _____

Company: _____

Street Address: _____

City: _____ State: _____ Zip Code: _____

Phone Number: _____ FAX: _____

- ☐ **WAXIE VERSA KV1750W**
- ☐ **WAXIE VERSA II KV1250W**
- ☐ **KV2150**
- ☐ **KV1715AC**
- ☐ **KV1715**
- ☐ **KV1215**
- ☐ **OMNIFLEX Pump Box**
- ☐ **OMNIFLEX Wet/Dry Vac**

Serial Number: _____

Type of Business

- ☐ **School/University**
- ☐ **Contract Cleaner**
- ☐ **Office**
- ☐ **Hospital/Health Care**
- ☐ **Industrial**
- ☐ **Other:** _____

Intended Uses (check all that apply)

- ☐ **Restroom Cleaning**
- ☐ **Cleaning Around Machines**
- ☐ **Classroom Cleaning**
- ☐ **Floor Stripping**
- ☐ **Stairwell Cleaning**
- ☐ **Other:** _____
- ☐ **Kitchen Cleaning**
- ☐ **Lockers & Showers**
- ☐
- ☐ **Carpet Extraction**
- ☐ **Hallway Cleaning**
- ☐

Thank you for registering for our warranty program.

Please return completed forms to:
Kaivac, Inc.
401 S. Third Street
Hamilton, OH 45011
Or Fax to: (513) 887-4601

kaivac cleaning systems

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

1.3 SAFETY PRECAUTIONS

IMPORTANT SAFETY INSTRUCTIONS—SAVE THESE INSTRUCTIONS

CAUTION: To reduce the risk of injury, read operating instructions carefully before using.
WARNING: Risk of injection or injury to persons – do not direct discharge stream at persons.
WARNING RISK OF ELECTROCUTION:

- Connect to a properly grounded outlet. Do not remove ground pin.
- Inspect cord before using – do not use if cord is damaged.
- Keep all connections dry and off the ground.
- Do not touch plug with wet hands.
- This product is provided with a ground fault circuit interrupter built into the power cord. If replacement of the plug or cord is needed, use only identical replacement parts.
- Test the ground fault circuit interrupter (GFCI) before each use.
- Do not close a door on the cord or pull the cord around sharp edges or corners.
- Keep the cord away from heated surfaces.
- Do not spray liquid from the Kaivac onto electrical outlets or on any electrical devices.
- Turn off the unit before unplugging.
- Do not pull on the cord to unplug. Grasp the plug at the outlet and pull.
- Read instruction manual before using.

Grounding Instructions:
THE VERSA II MUST BE GROUNDED. If it should malfunction or stop working, grounding provides a path of least resistance for the electrical current and reduces the risk of electrical shock. The VERSA II is equipped with a ground fault circuit interrupter (GFCI) to further reduce danger and risk of electric shock. It must be maintained and tested regularly. An equipment grounding cord and plug is included with the unit. Cutting off the ground wire or using a cord with an ungrounded plug will void the warranty on the Kaivac.

Improper connection of the equipment grounding cord can result in the risk of electrical shock. Ask a qualified electrician or service person to check the outlet grounding if you are unsure. Do not modify the plug provided with the Kaivac. If it will not fit into the outlet, have a properly grounded outlet installed by a qualified electrician.

WARNING: When using this product, basic precautions should always be followed, including the following:

- Read all the instructions before using the product.
- To reduce the risk of injury, close supervision is necessary when a product is used near children.
- Know how to stop the product and bleed pressures quickly. Be thoroughly familiar with the controls.
- Stay alert – watch what you are doing.
- Do not operate the product when fatigued or under the influence of alcohol or drugs.
- Keep operating area clear of all persons.
- Do not overreach or stand on unstable support. Keep good footing and balance at all times.
- Do not use to pick up flammable or combustible materials.
- Follow the maintenance instructions specified in the manual.

Personal Protective Equipment (PPE): It is recommended to wear proper personal protective equipment as required by the chemical product label instructions used in conjunction with the Kaivac.

FOR INDOOR USE ONLY

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

2.1 OUT-OF-BOX SETUP INSTRUCTIONS

1



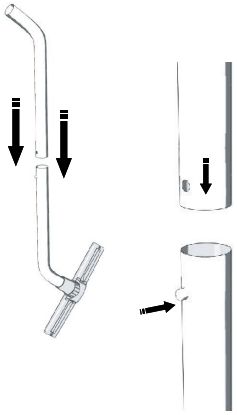

Remove vac wand sections from the accessory box and attach together until locking pin engages as shown

2

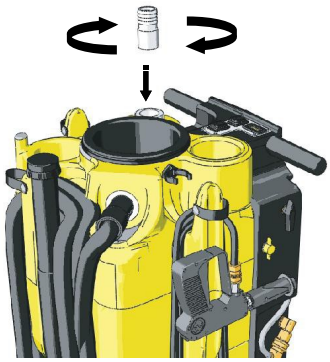

After removing machine from container, attach the plastic elbow to the vac tank as shown above

3

SMALL HOSE

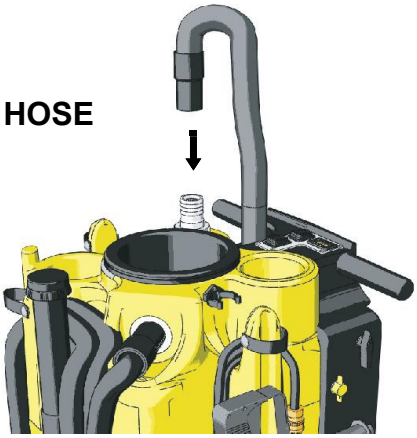

Attach vac motor hose to barb and vac motor inlet as shown above

4

Remove the tools and hoses from the accessory box and place them in the appropriate locations as shown above. Place extra tools in tote bag and hang bag over nose of machine.

5 Remove the Vacuum Hoses from the Accessory Box. Assemble as shown.

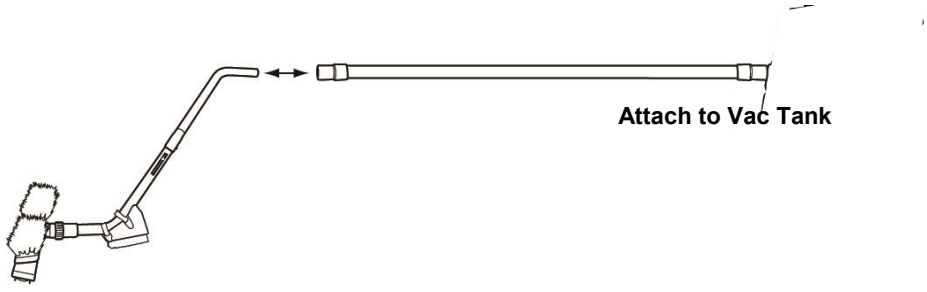

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

2.2 WAXIE VERSA II TOOL ARRANGEMENT

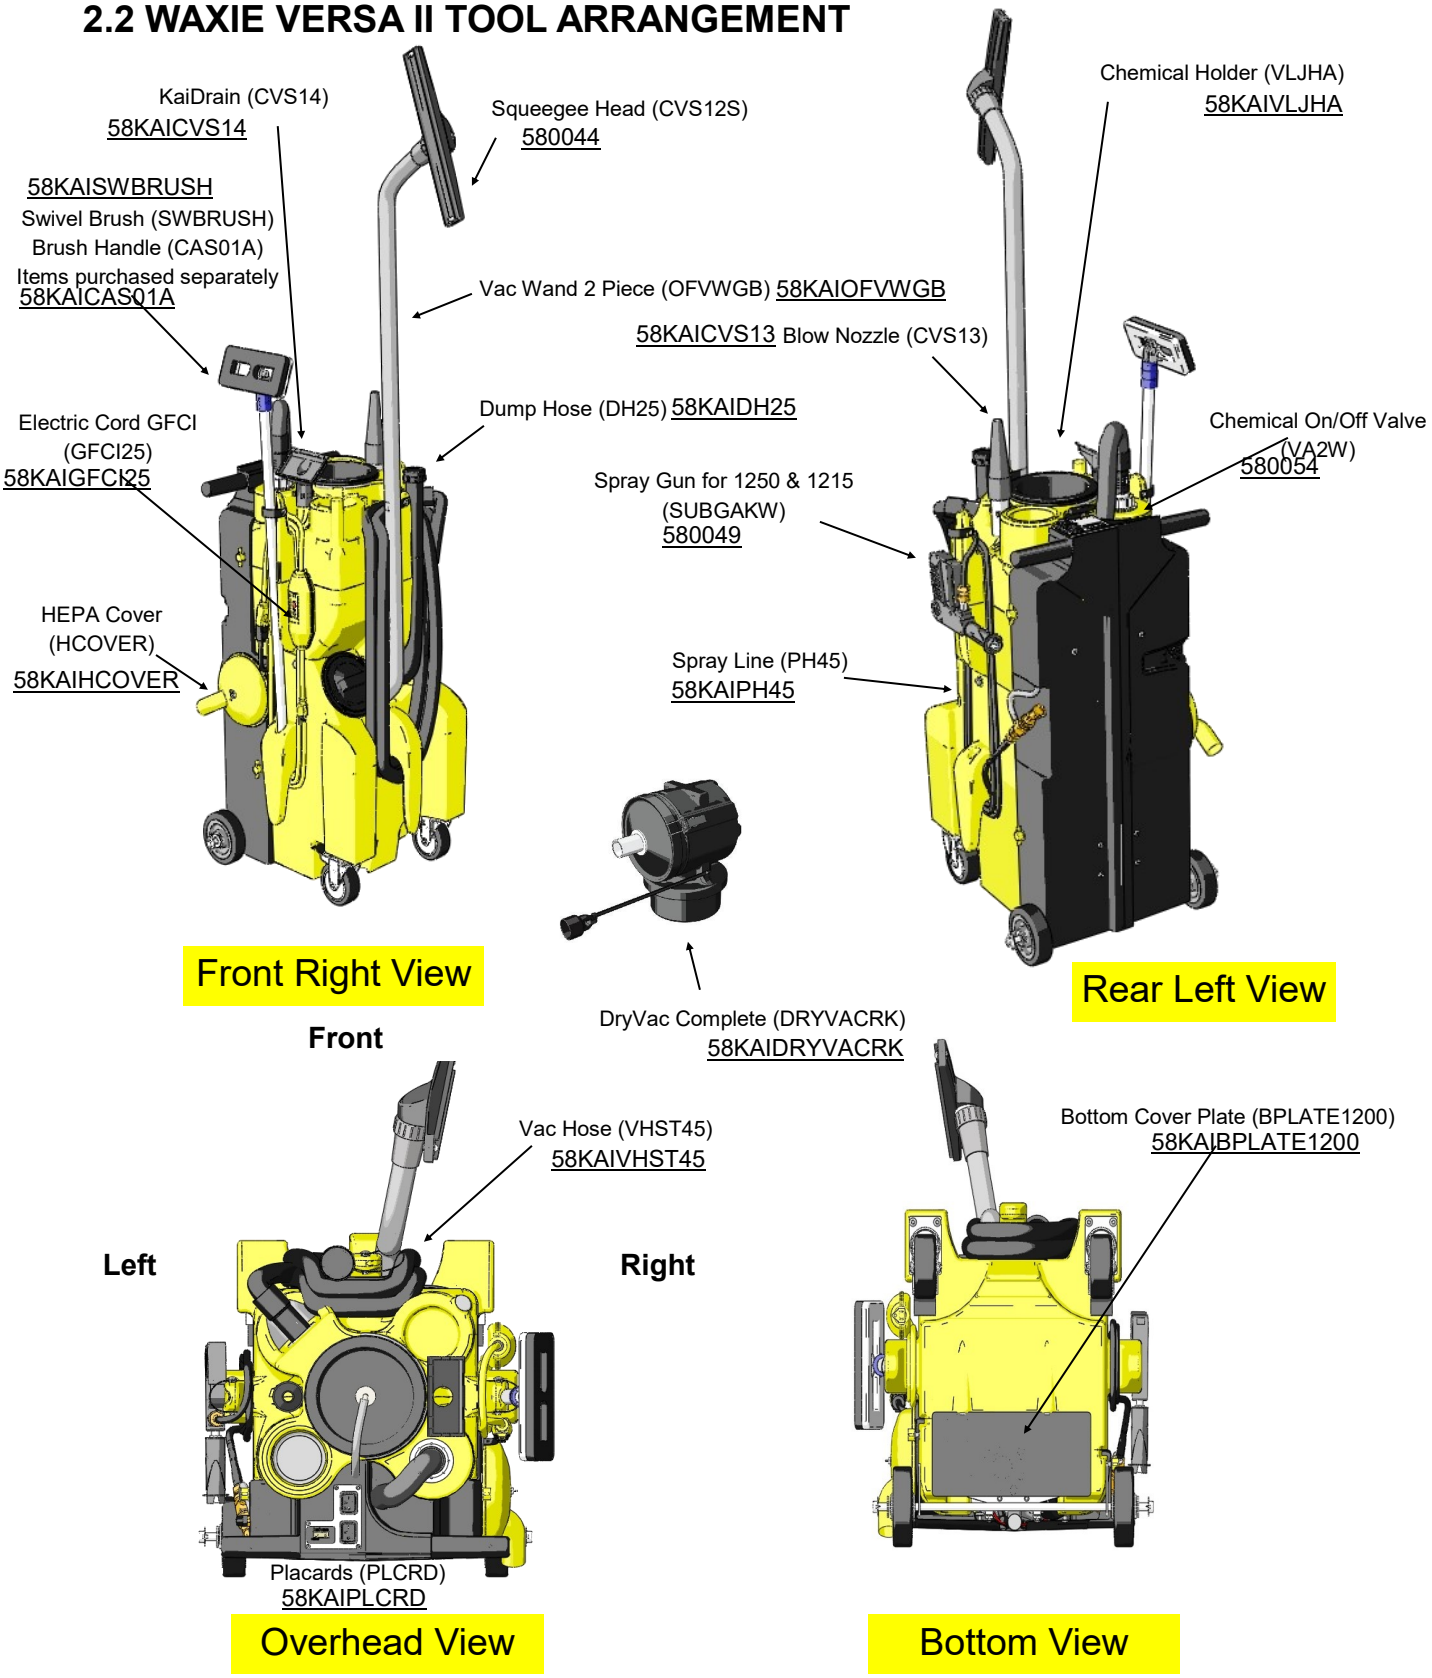

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

2.3 PREPARING FOR USE

***Applicable to all units, but KV1700 Series shown for illustration**

1. Fill machine with clean, cool water.	
2. Prepare the cleaning solution you will be using by attaching the chemical feed line and cap to the top of your chemical bottle and selecting the proper metering tip. (See placard for metering tip information)	
3. Check machine for all tools and supplies needed to complete task. See "Tool Arrangement" in Section 2.2 of this manual.	
4. If using a cleaning product that has high foaming use a foam inhibitor to cut down on foam. Pour 2 capfuls of inhibitor in the vac hose with vac running to coat inside of hose.	
5. Check all hoses and spray lines for damage prior to use. If damage is found, do not continue until proper repairs are completed.	
6. Plug in machine and test GFCI (Ground Fault Circuit Interrupter) to ensure it is working properly. You are now ready.	

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

2.4 1200 SERIES VAC TANK HORN OPERATION

1

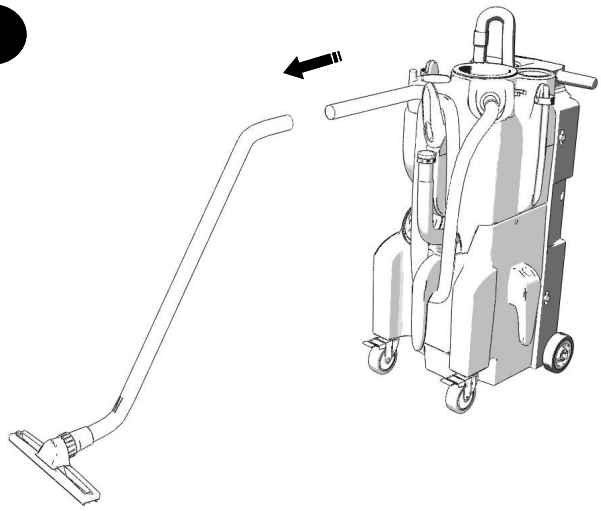

Connect the vacuum wand and slinky hose together

2

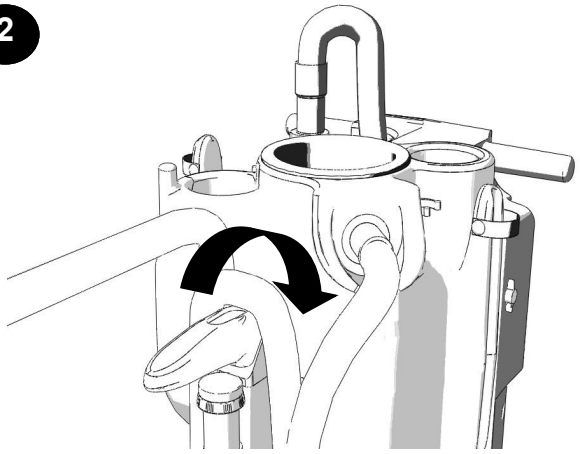

Rotate the horn assembly so that it is now pointing towards the front of the machine.

3

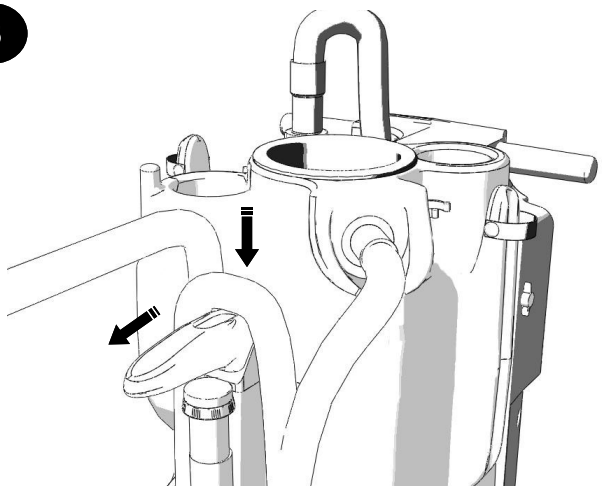

Place hand behind vac hose and slide forward off of horn onto floor.

4

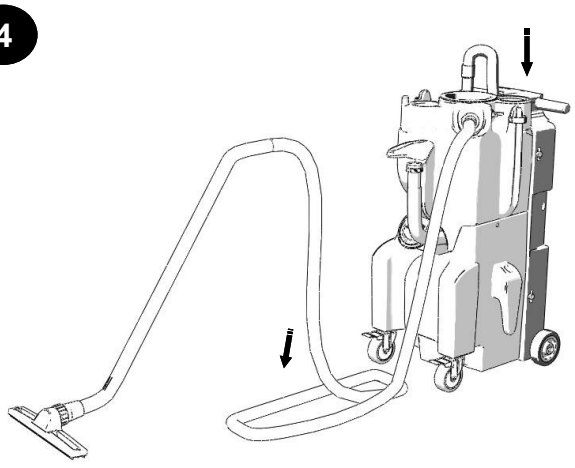

Once hose is off and on floor turn on vac motor and proceed extracting.

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

***Applicable to all units, WAXIE VERSA Series shown for illustration.**

2.5 S.I.M.P.L.E PROCESS

Set-up

Fill with clean, cool water



Add 1 cap of KaiDri
(for spot-free rinsing)



Select metering tip and
insert into cap barb

Inject

Chemicals



Fan Spray

LOW Pressure Mode

Fan Spray



Manual

Brush

Manually brush
heavily soiled
areas

Pressure

wash and
rinse

Fresh Water



Fan

HIGH Pressure Mode

Loop



Adjust last loop (if needed)

Extract

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.1 MACHINE MAINTENANCE

⚠ **CAUTION** Always make sure machine is unplugged before lifting electric cover assembly

Item	Procedure
Floor Squeegee	• Check condition of squeegee blades and wheels on the floor tool. • Rough floor surfaces will cause the blades and wheels to wear out more quickly. Replace as necessary
Spray Gun	• Check spray pattern. If spray pattern will not pinpoint, clean orifice by removing it with an Allen wrench and flushing. Replace if needed. • If nozzle becomes difficult to move from high to low pressure lubricate nozzle with lithium grease.
Pressure Hose	• Wipe clean after each use. • Check for cuts or frays in the hose jacket, particularly at the end of the fittings. Replace hose if cuts are found
Water Tank	• Check condition of filter in water tank. Clean as needed. • Empty the water tank to prevent mildew and bacteria growth. Empty tank by dipping the vacuum hose into the water tank and transferring the water to the vacuum tank.
Vacuum Tank	• Empty and flush vacuum tank. • Clean and disinfect. • Check the float shutoff screen to be sure it is not plugged up. A plugged filter screen restricts airflow and results in reduced suction.
Leaks	• Be alert for leaks around hoses, fittings, spray wand, tanks or elsewhere. • Discontinue use until leaks are repaired
Electrical System	• The ground fault circuit interrupter (GFCI) must be tested before each use. • Electric cord must be inspected for tears or cuts in the insulation.
Vacuum Wand	• Use a wire brush or coarse brush with acid cleaner or other to remove residue from threads on the coupling and coupling nut. Apply grease when done.
HEPA Filter	• Replace every 3-6 months depending on use

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.2 BLACK BOX REMOVAL INSTRUCTIONS

1

Remove all hoses, cords, and tools prior to black box removal.

2

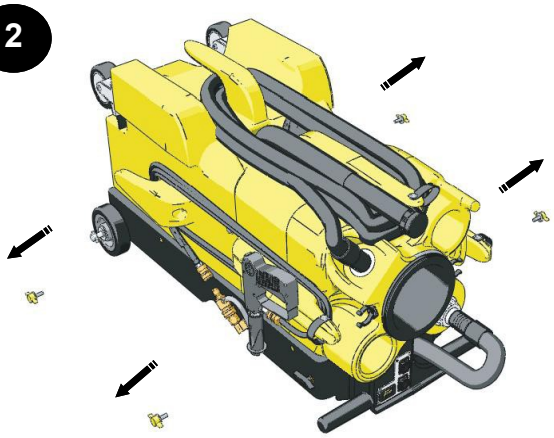

Laying the machine on its back remove the four yellow wingbolts as shown above

3

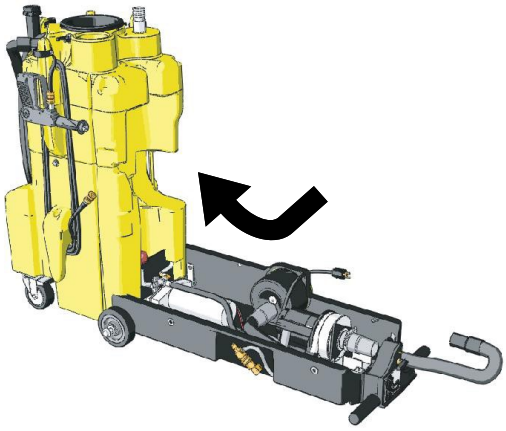

Placing your foot on one of the two handles, tilt the yellow tanks upward until standing upright

4

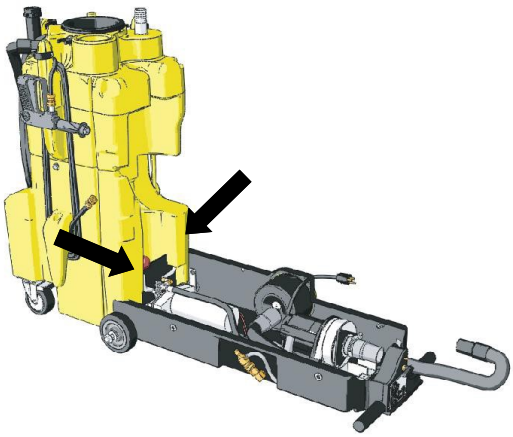

Locate and disconnect the water line and return line behind the black box on the machine

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.3 TROUBLESHOOTING

⚠ **CAUTION** Always make sure machine's unplugged before lifting electric cover assembly

Area	Problem	Possible Cause	Solution
Electrical	No Power to pump or vac motor	Machine not plugged in	Plug machine in
		Switch not "on'	Check switches for "on"
		GFCI tripped	Test and reset GFCI
		Building circuit overloaded	Check and reset circuit
		Switch wires loose	Disconnect power and check for loose wire
		Connections loose	Disconnect Power and check for loose wire under panel
	Electrical burning smell	Vac motor brushes worn	Remove vac motor and repair
		Vac motor hung up	Release pressure on hose and jog vac switch, or replace
		Pump motor hung up	Release pressure on hose and jog pump switch, or replace
Vacuum System	No / Weak vacuum	Vac tank full	Empty vac tank
		Squeegee blades or wheels worn	Replace wheels or blades and check periodically
		Float shutoff screen dirty	Spray off float screen to clean
		Float ball stuck	Tap float and release/clean
		Damaged hose	Cut and repair/replace
		Dump hose plug missing	Contact dealer and replace
		Access lid not tight	Tighten lid hand tight
		Vacuum hose plugged	Flush hose to remove debris
		Too much liquid in vac hose	Allow air in when vacuuming
		Vac hose still wrapped	Unwrap vac hose fully
		Exhaust plugged	Remove HEPA filter and clean
		Leak in vac tank	If repairable, clean and dry affected area and seal with silicone
		HEPA Filter clogged	Remove HEPA filter and clean
	Moisture from exhaust	Vac tank full	Dump vac tank
		Float shutoff missing	Replace
		Excessive foam in vac tank	Use defoamer
Blow Dry System	No air flow	Hose disconnected	Reconnect hose
	Moisture from nozzle	Water in blow hose	Dry blow line
	Suction, not blow action	Vacuum hose connected to vac tank	Reconnect to vac motor exhaust hose

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

Area	Problem	Possible Cause	Solution
High Pressure System	No water from pump or low pressure	Out of Water	Fill water tank
		Gun nozzle plugged	Remove orifice with Allen wrench and clean
		Air in pump (vapor lock)	Use power prime technique
		Gun orifice missing	Replace orifice
		Water tank filter plugged	Clean tank and filter
		In - line bowl filter plugged	Remove filter cover and clean
		Bowl filter lid loose	Gently tighten bowl cover
		Pressure hose damaged	Repair or replace
		Quick disconnect leaking	Tighten or replace
		Injector plugged	Remove safety cap from chemical and blow small amounts of compressed air into line
		Pulse hose damaged	Repair or replace
		Regulator failed	Replace
		Hose kinked	Unkink and check for damage
		Seals in pump need re-placed	Remove and replace seals
	Bad fan pattern or pinpoint pattern on gun	Debris in nozzle	Remove orifice with Allen wrench and clean
		Orifice damaged	Remove and replace
Chemical Injection System	No chemical flow	Out of chemical	Refill chemical
		Safety cap not secure	Check safety cap / tighten
		Chemical valve “off”	Check on / off valve
		Safety cap plugged	Replace cap
		Spray gun in wrong mode	Make sure gun nozzle is pulled out away from gun chemical mode
		Metering tip plugged	Check metering tip for clog
		Injector plugged	Remove safety cap from chemical and blow small amounts of compressed air into line
		Air entering system	Check for air entering system around chemical lines or injector
		Injector installed back-wards	If fluttering or pulsing sound can be heard while spraying or when machine is running it is possible that your injec-tor is in backwards. Remove and rein-stall
		Kink in Chemical line	Replace Chemical line

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

Area	Problem	Possible Cause	Solution
Chemical Injection System continued	Not enough chemical	Metering tip plugged	Remove and clean
		Wrong metering tip	Check and replace per chart
	Chemical line blows off safety cap	Debris in injector	Remove safety cap from chemical and blow small amounts of compressed air into line
	Water back flows into chemical bottle	Bad seat on injector check valve	Check injector o - ring or re-place
		Bad safety cap	Replace safety cap
Dump System	Dump hose will not empty tank	Dump hose cap not removed	Remove cap
		Clog in bottom of tank	Tip dump contents, remove debris
	Dump hose leaks	Hose cut	If leak is less than 4” from tank side, cut and reattach, or replace
		Clamp loose	Tighten hose clamp
		Dump cap missing	Replace cap
Wheels and Casters	Wheels won’t roll, or they rub	Flat tires	Inflate tires to 30 p. s. i.
		Debris wrapped around axle	Check for debris on axle
		Bearings tight	Grease bearings
		Wheels too loose on axle	Remove wheel, add washers to take up slack
		Bearings falling out	Replace bearing assembly
Squeegee Head	Floor streaks	Worn blades or wheels	Replace wheels and / or blades
	Squeegee head doesn’t easily rotate when installed on wand	Brass ring on wand not in groove	Loosen coupling nut and re-position head on groove
		Coupling nut too tight	Loosen 1 / 2 turn
	Head won’t stay on wand	Coupling nut cracked	Replace
		Brass ring worn	Replace
	Premature blade wear	Squeegee wheels worn	Check wheels for wear / replace
	Sucks to the floor too tightly	Squeegee wheels worn	Check wheels for wear / replace

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 VACUUM DIAGRAM

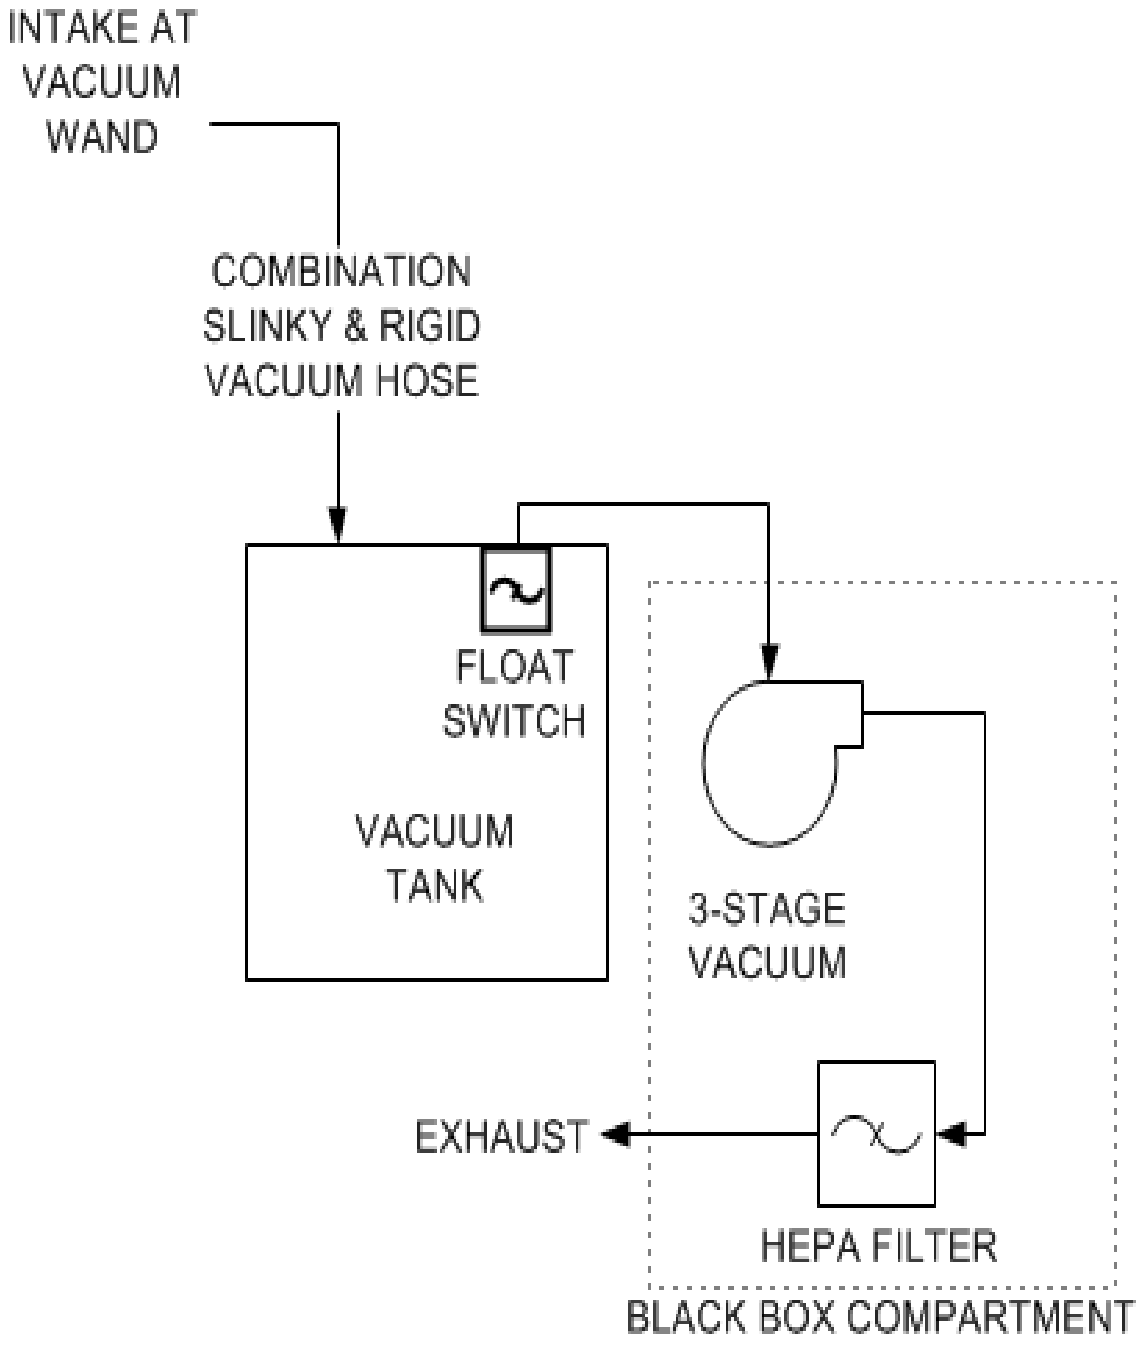

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 PUMP DIAGRAM

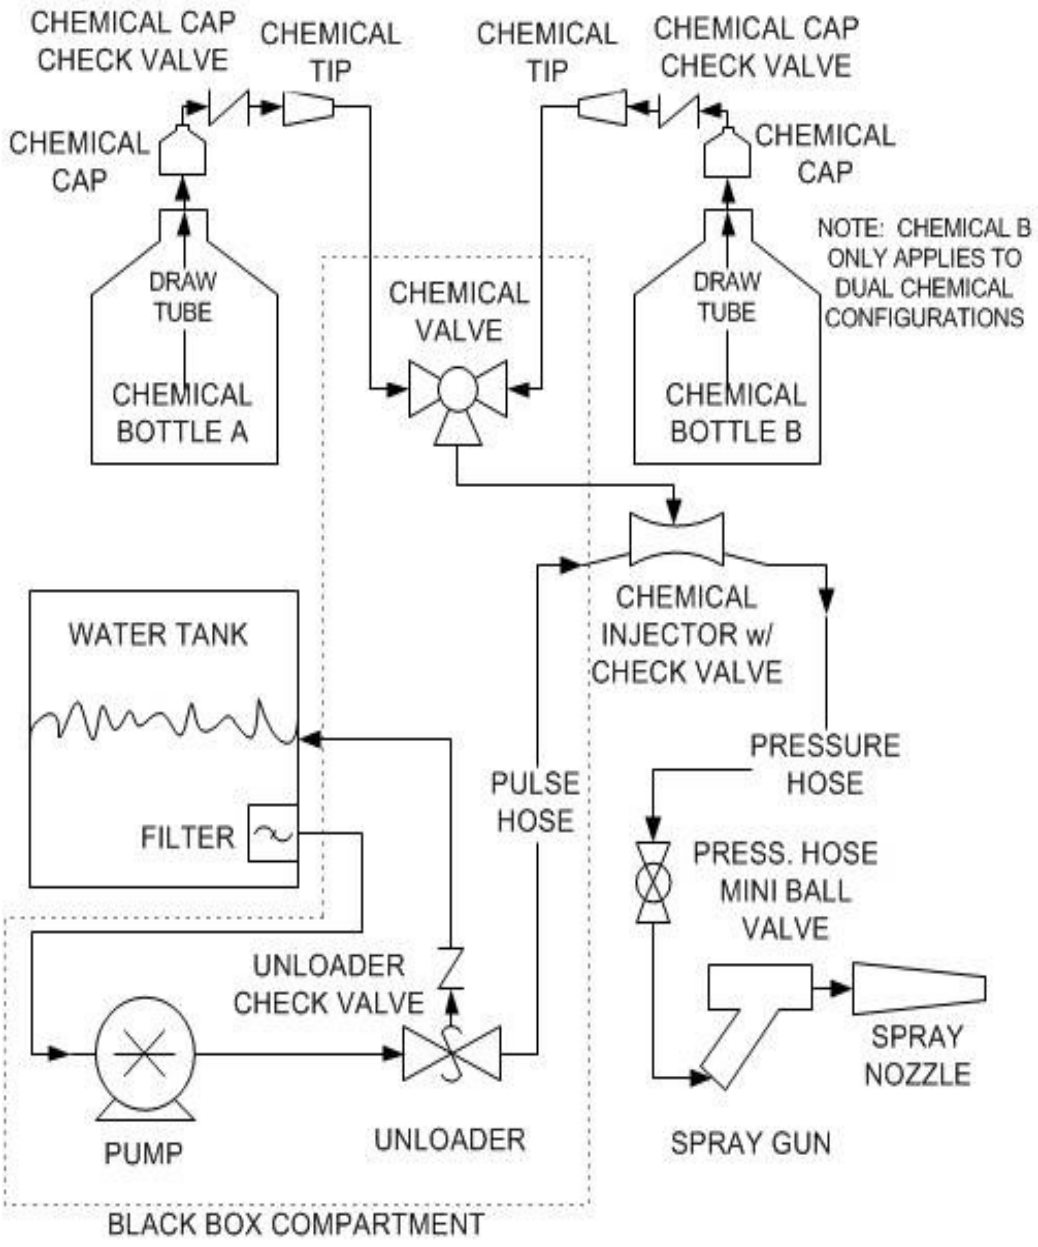

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 ELECTRICAL DIAGRAM

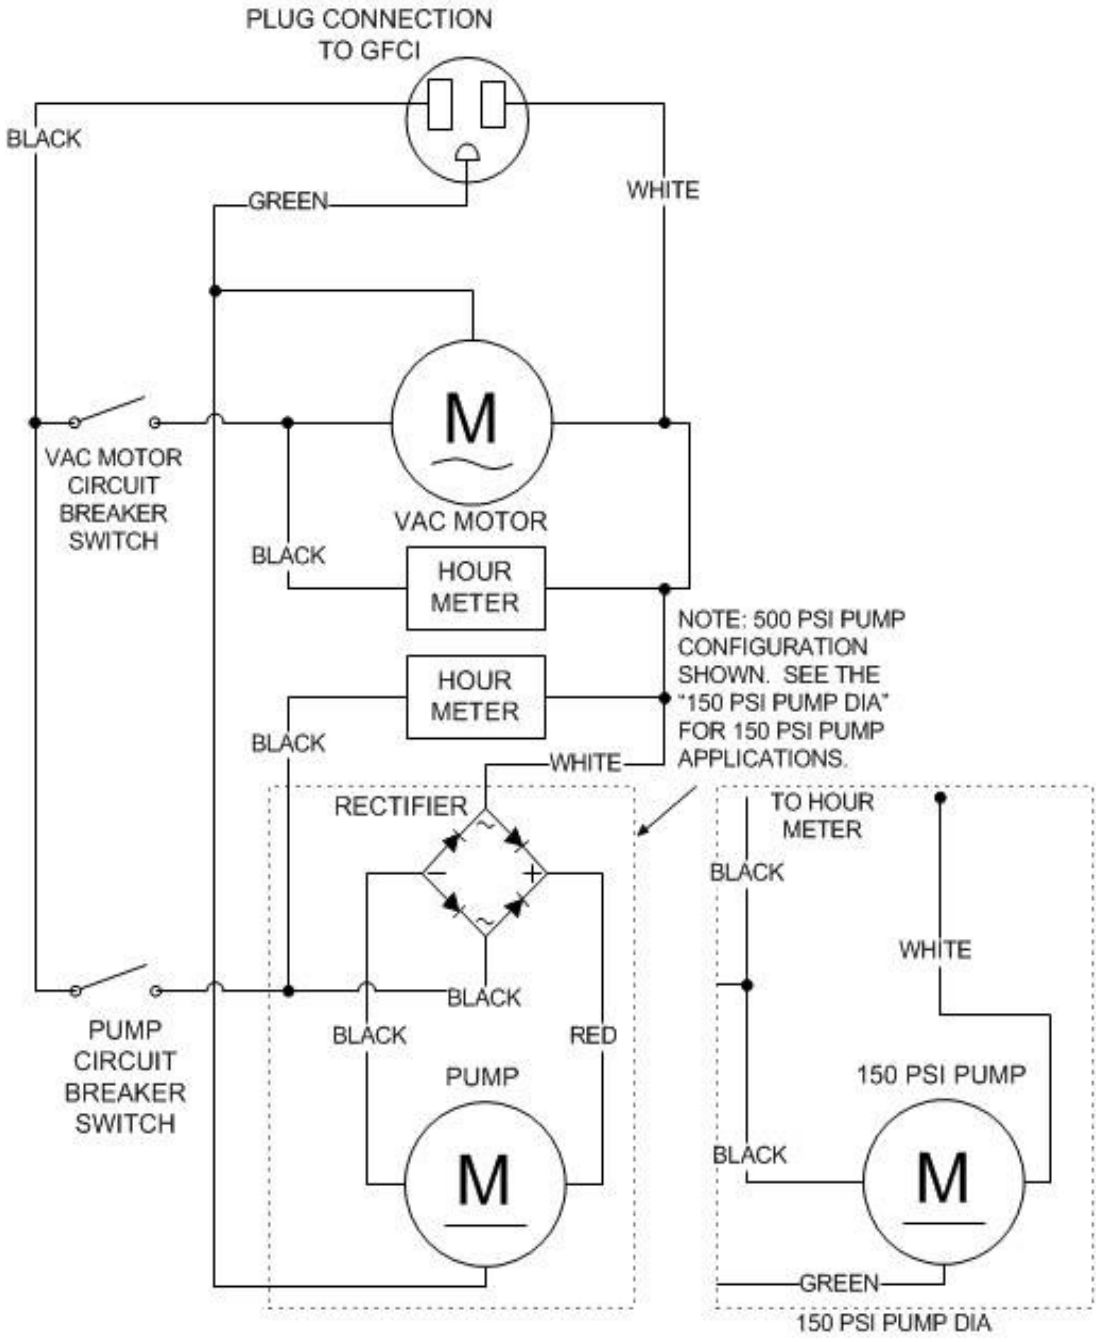

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

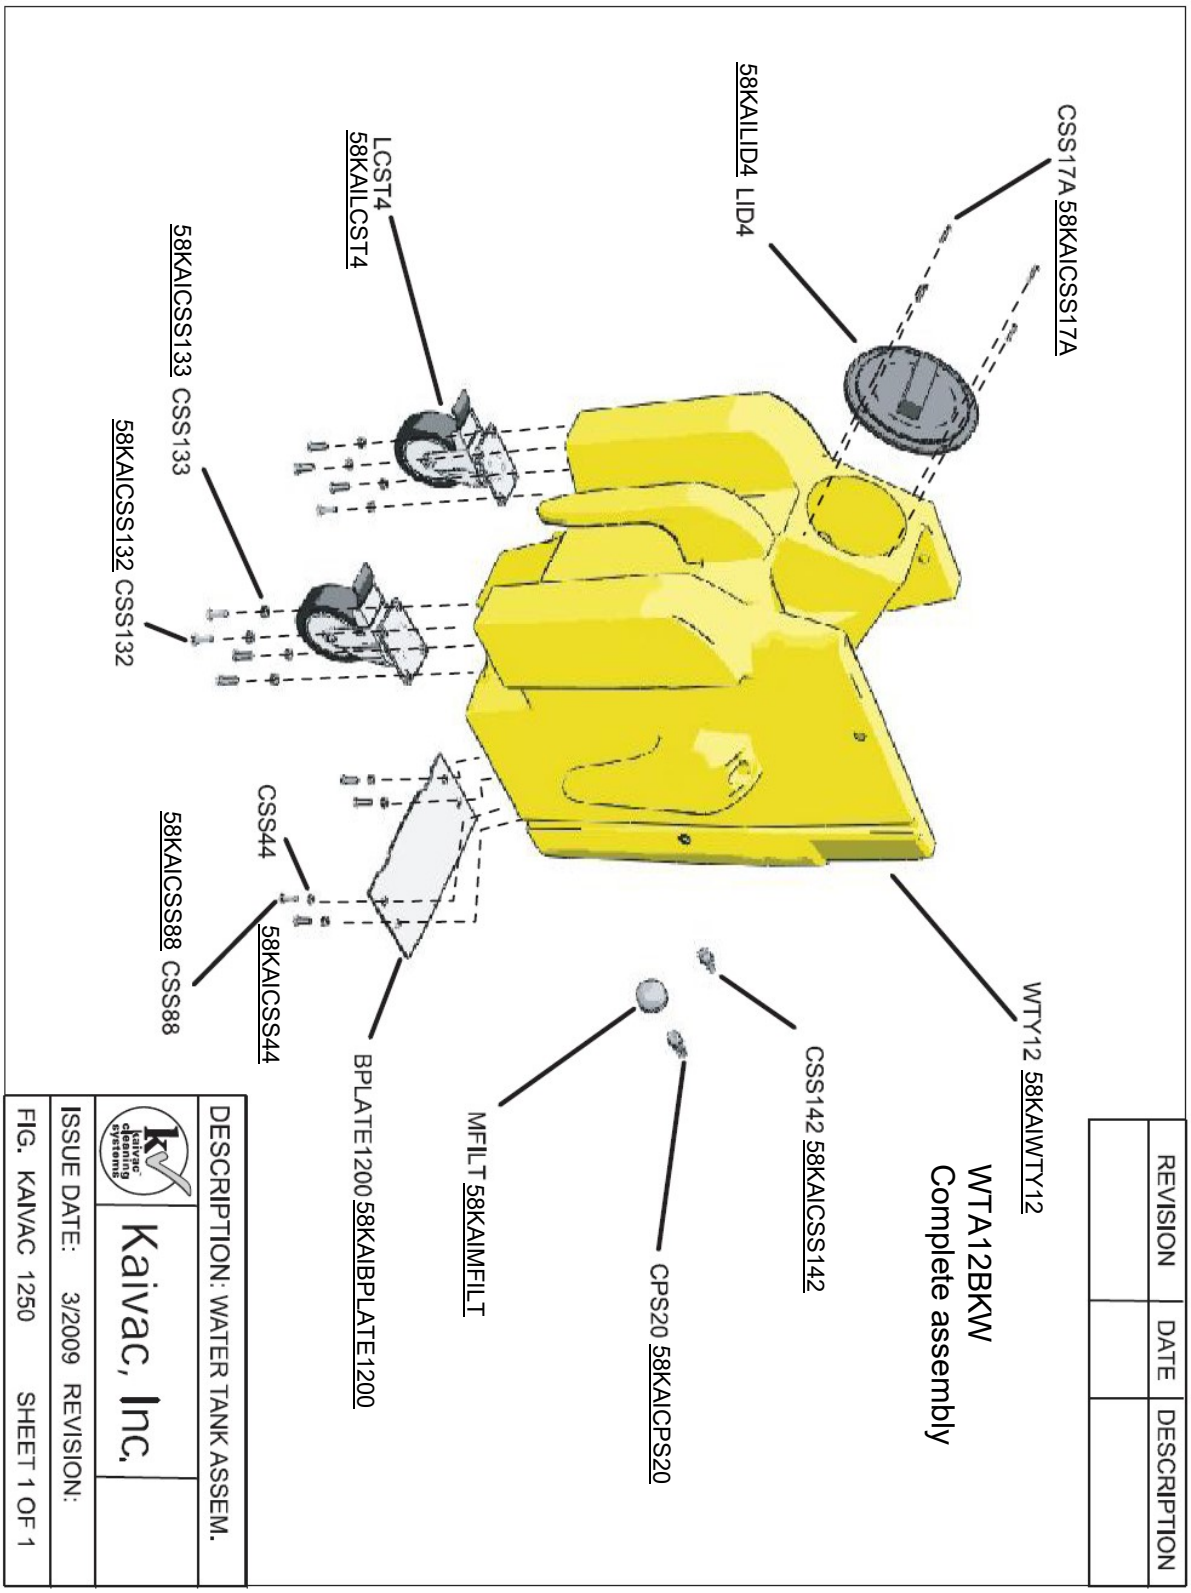

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

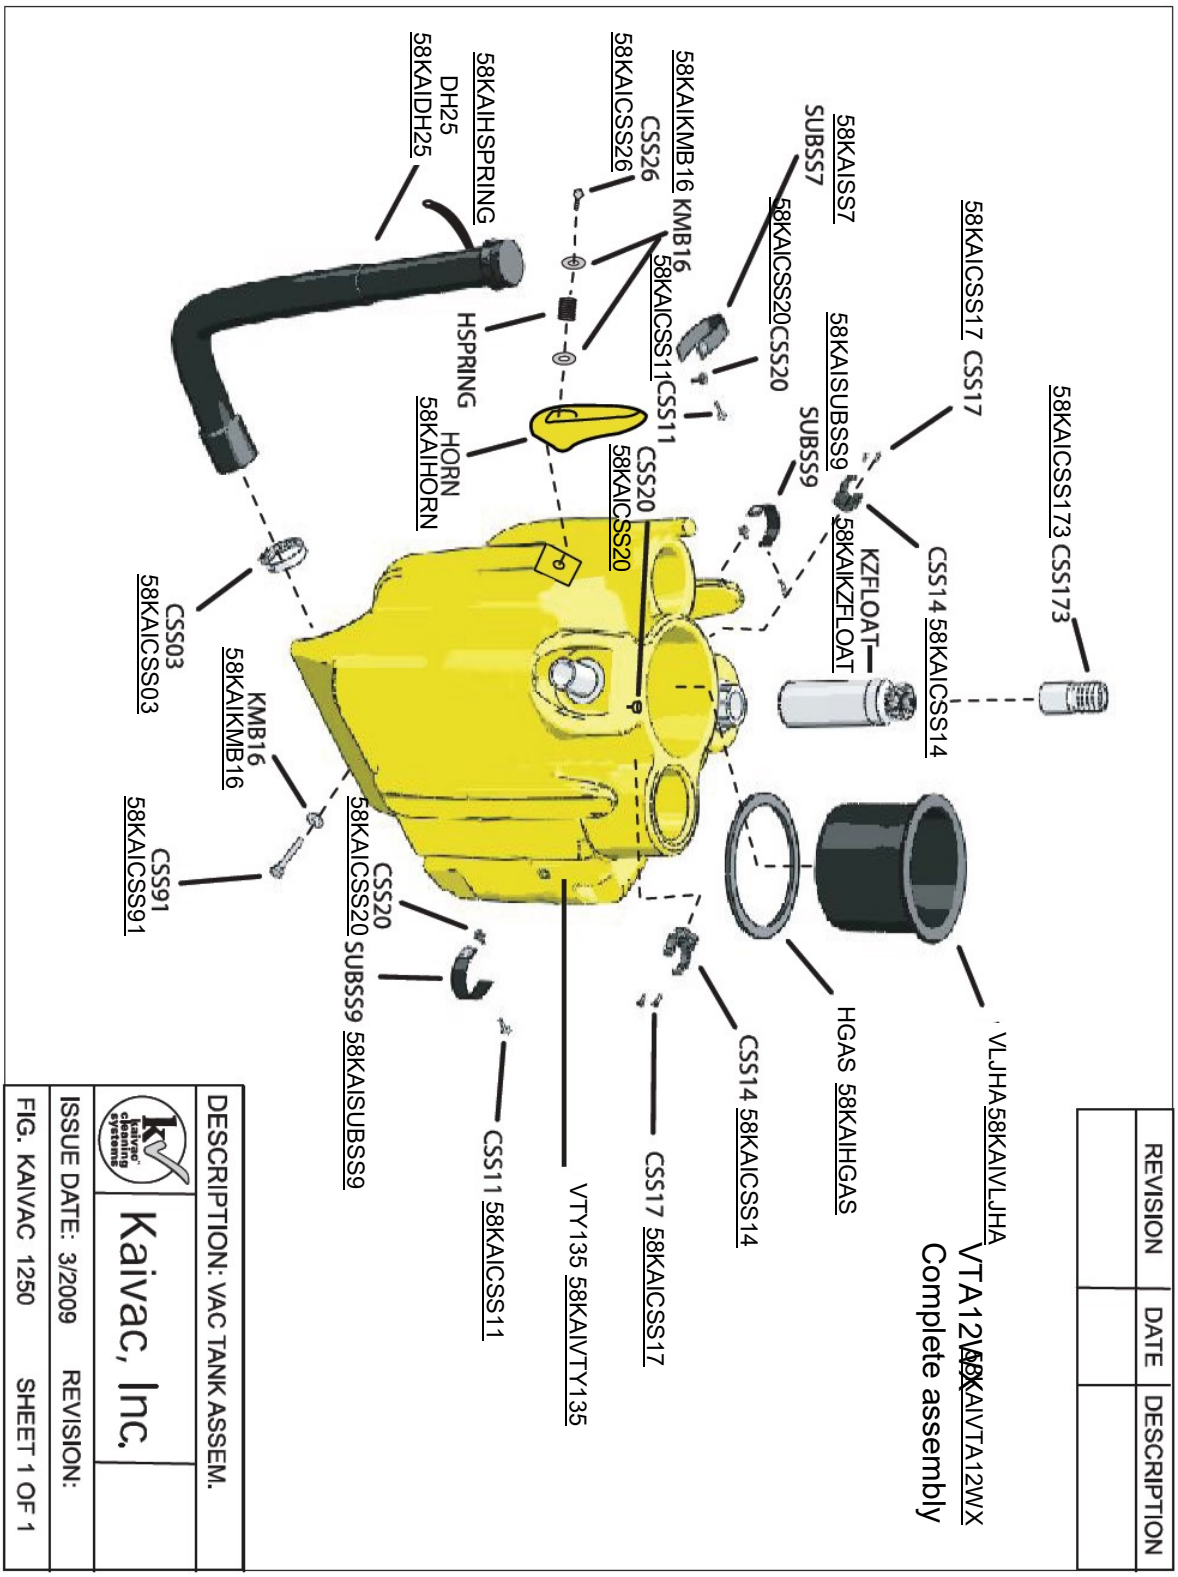

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

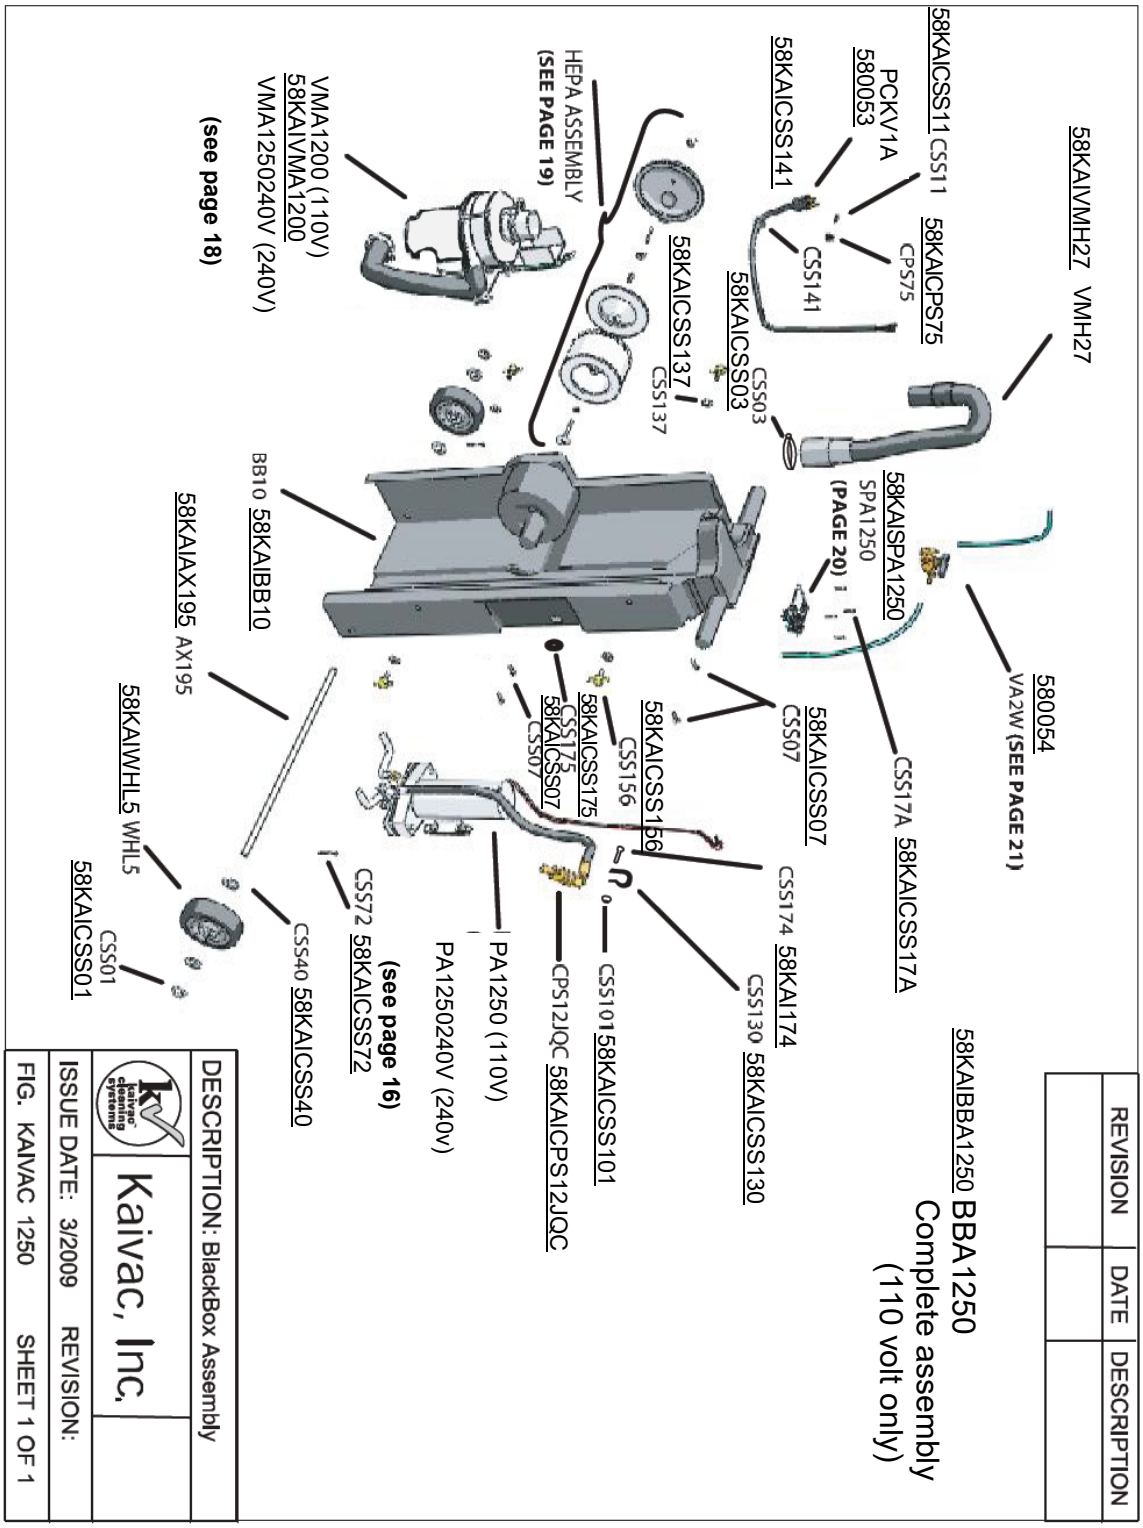

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

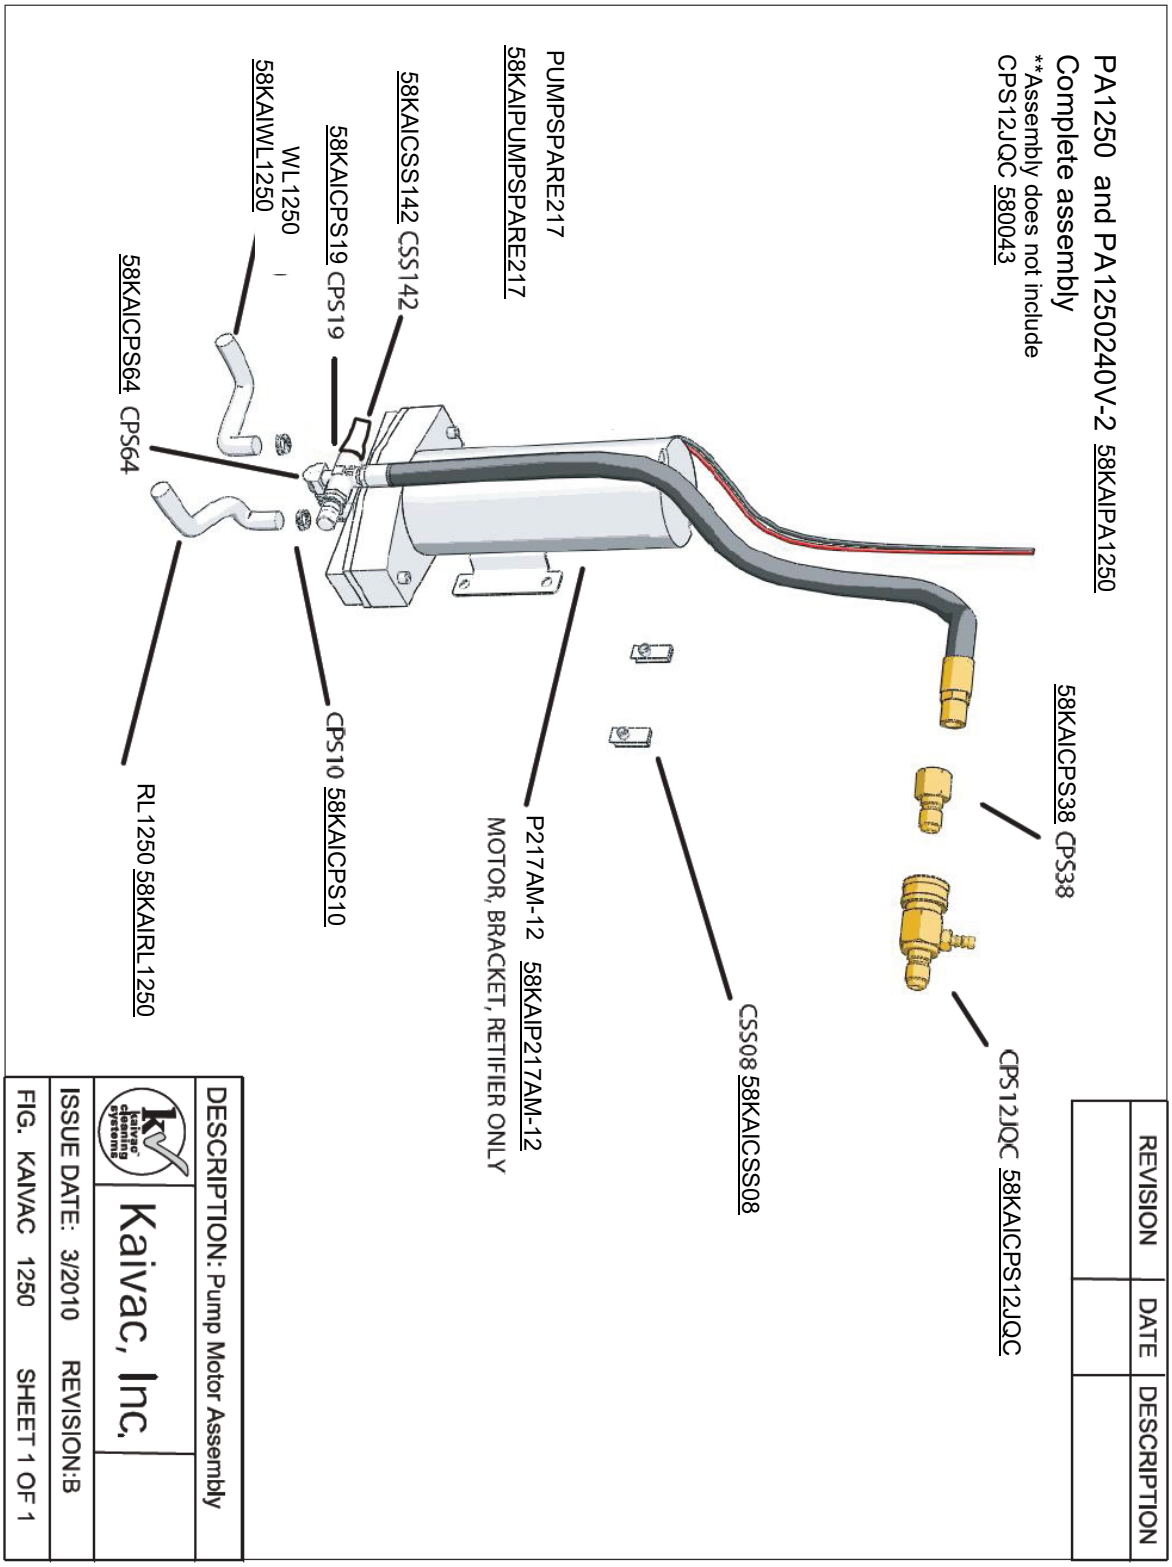

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

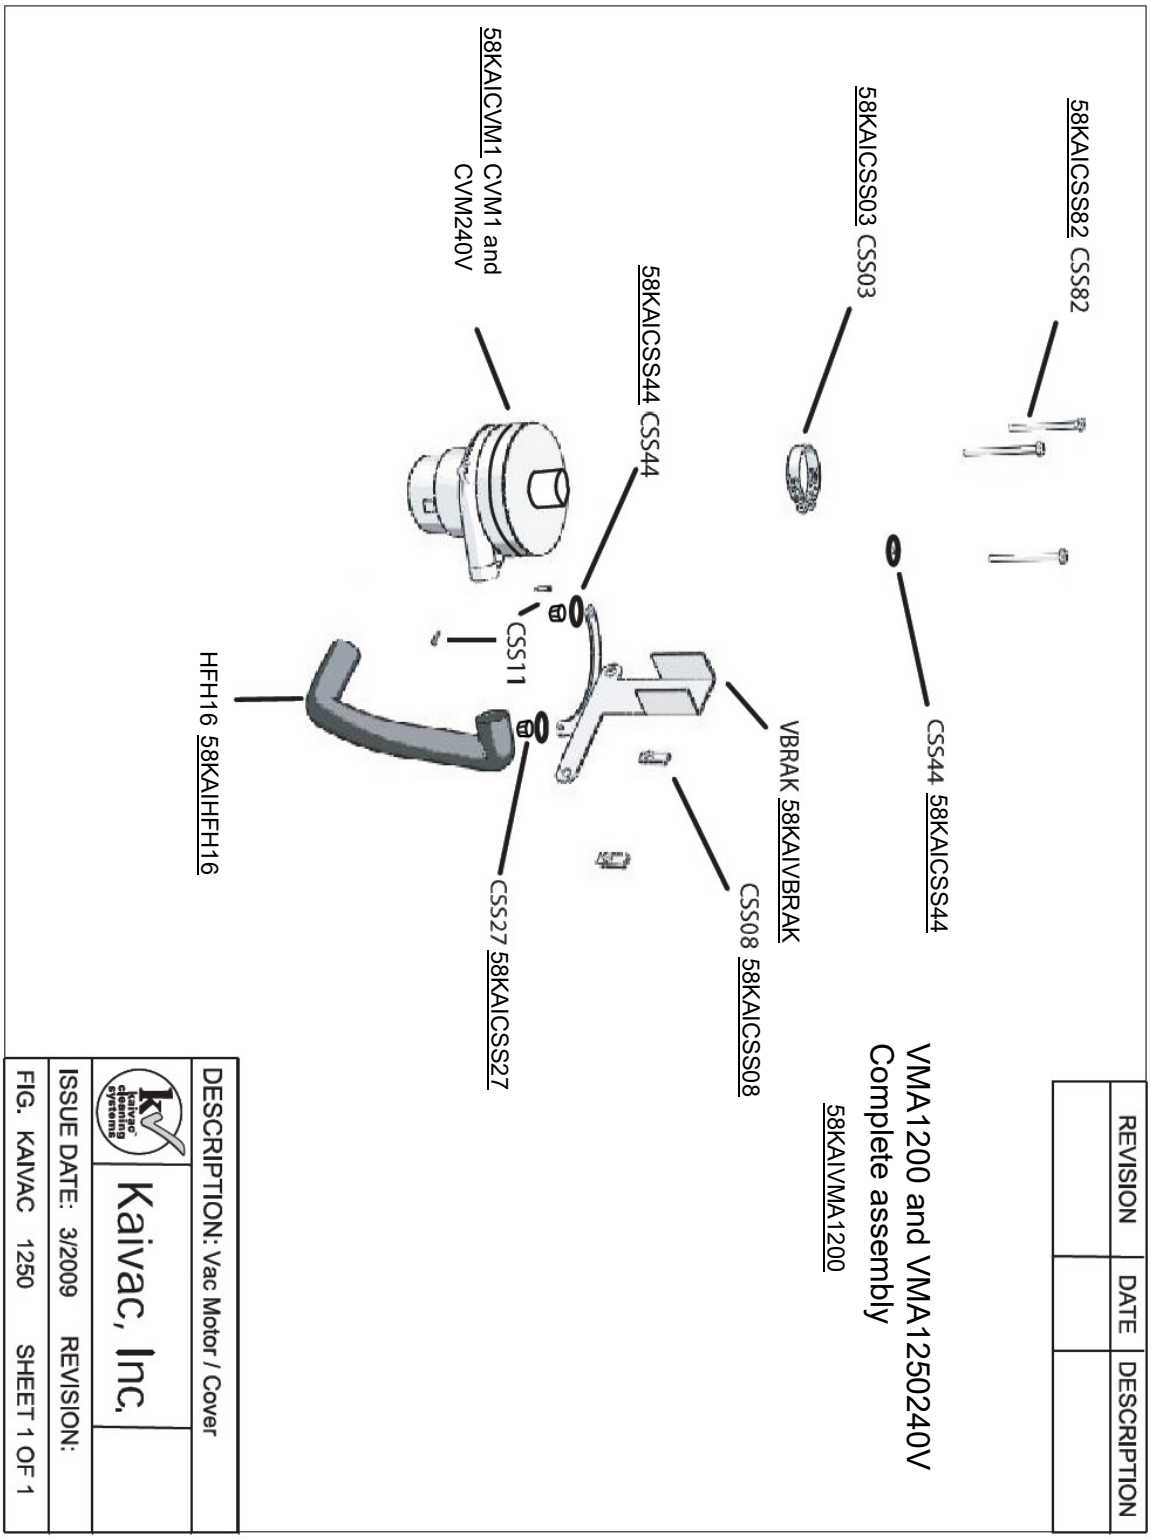

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

HEPA HOUSING ASSEMBLY

(HEPAHA2)

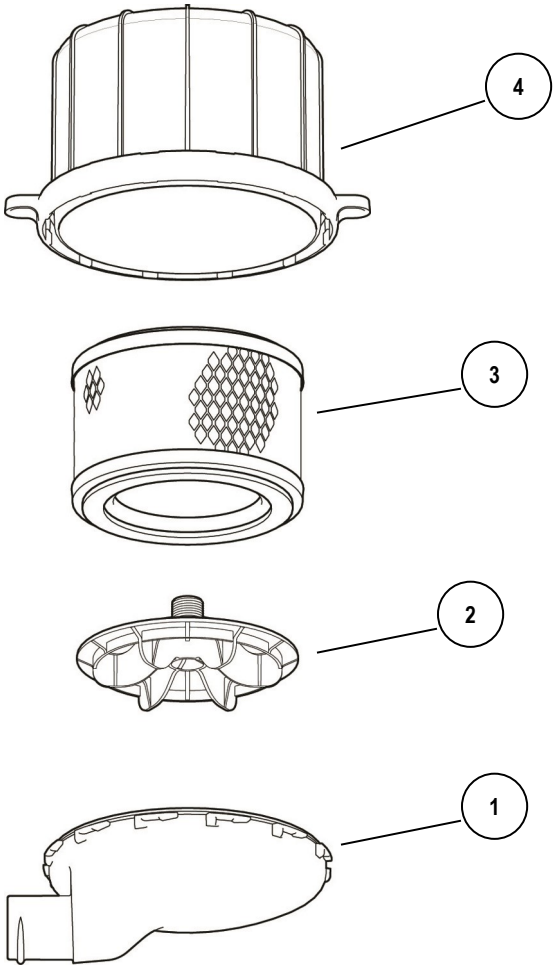

	#	PART NO.	PART DESCRIPTION
58KAIHCOVER	1	HCOVER	HEPA COVER
58KAIFKEEP2	2	FKEEP2	HEPA FILTER KEEPER
58KAIHEPA	3	HEPA	HEPA FILTER
58KAIHEPAH2	4	HEPAH2	HEPA FILTER HOUSING

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

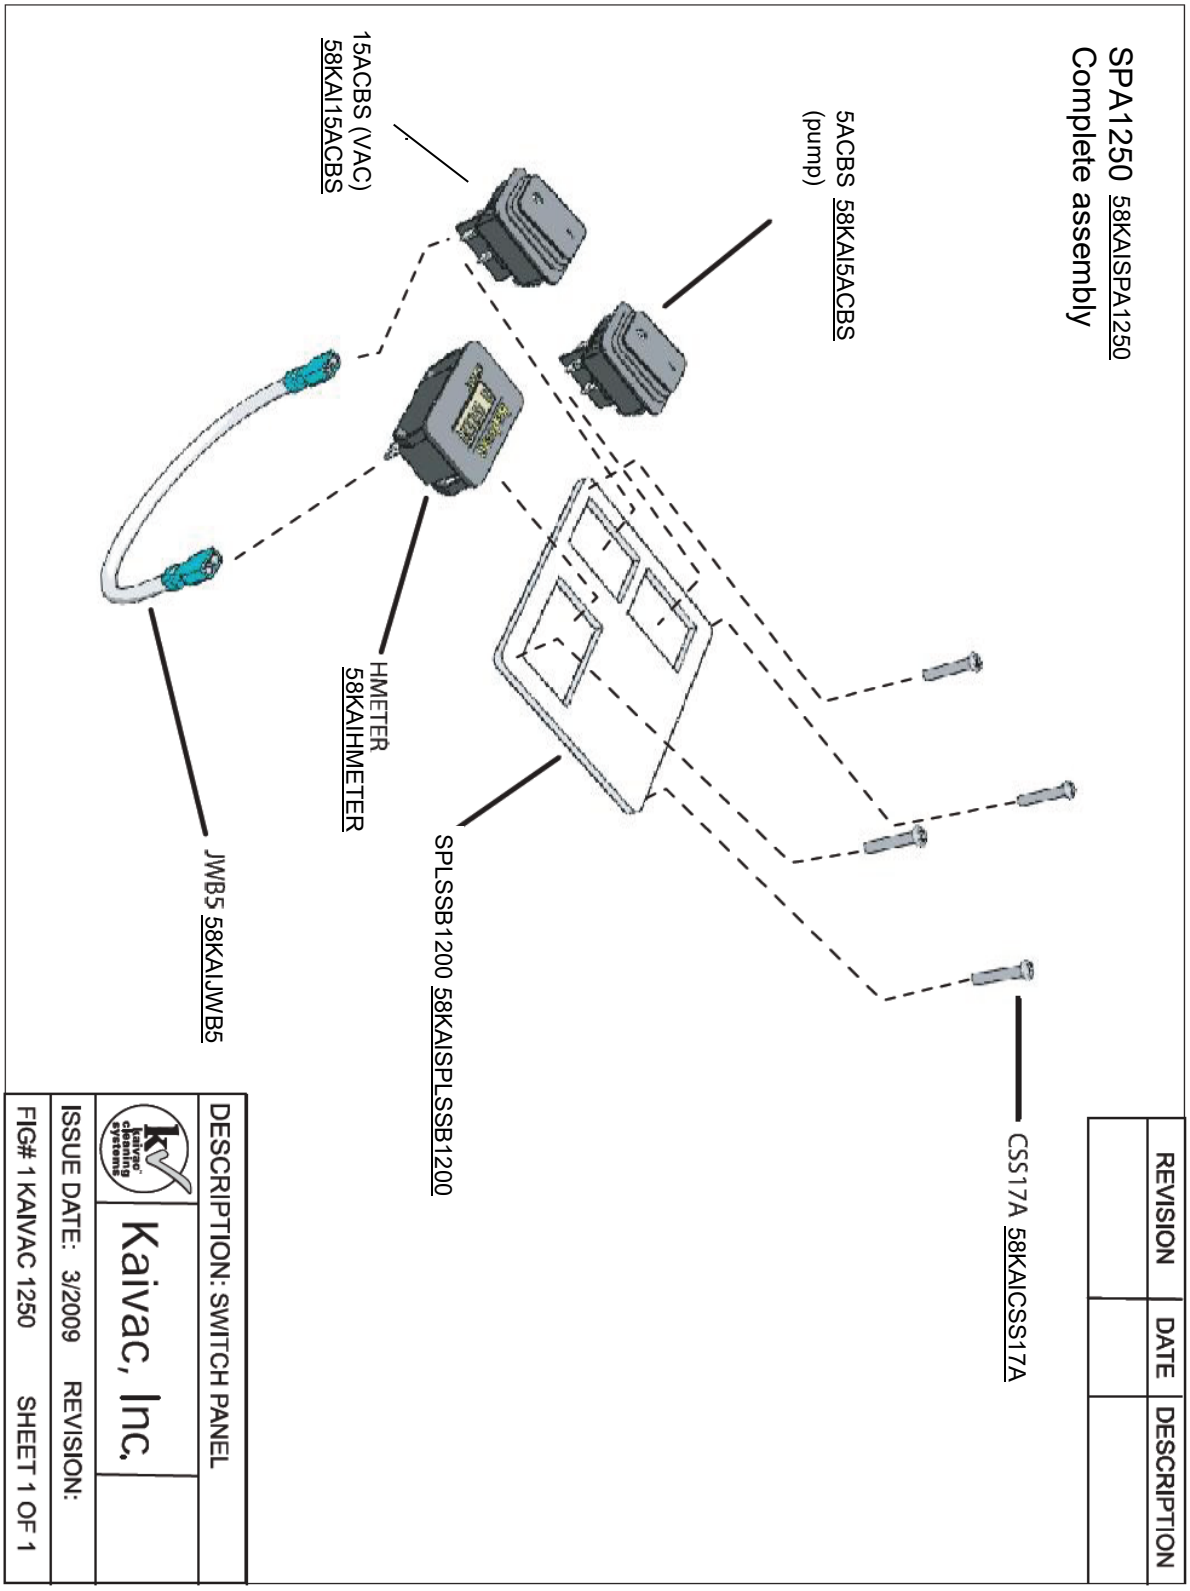

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

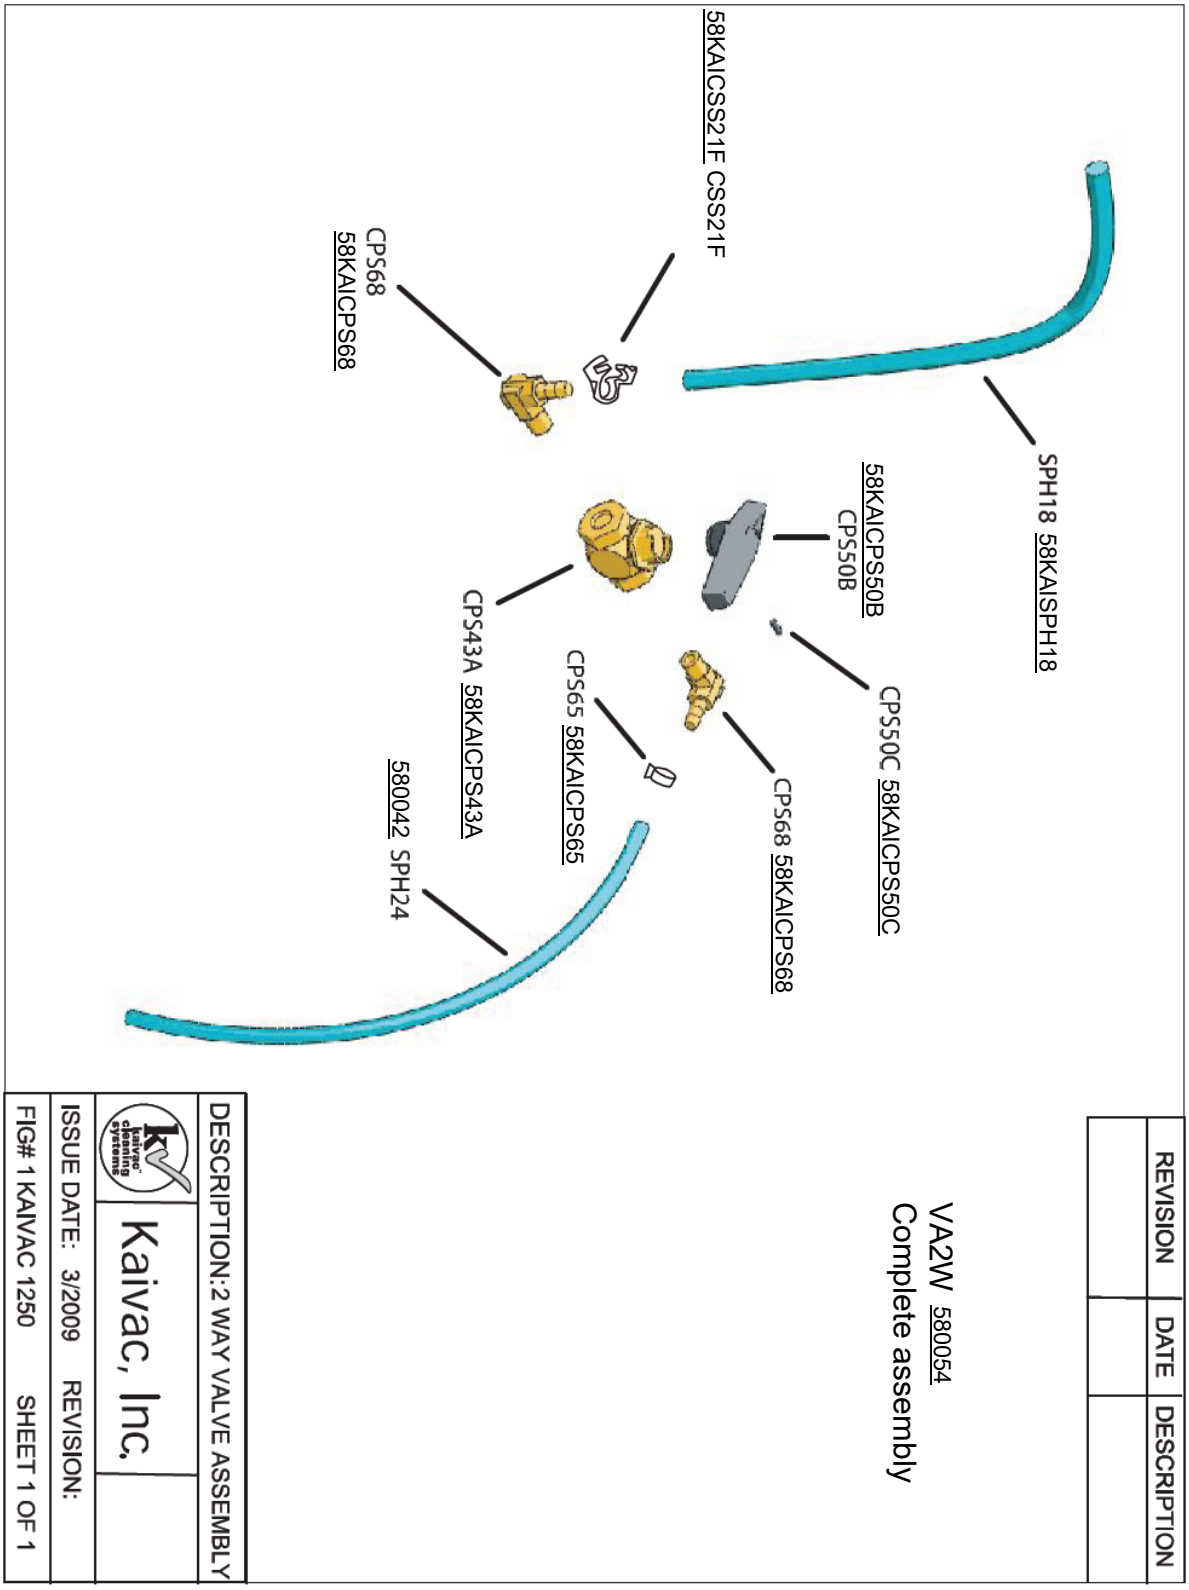

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.4 MACHINE DIAGRAMS

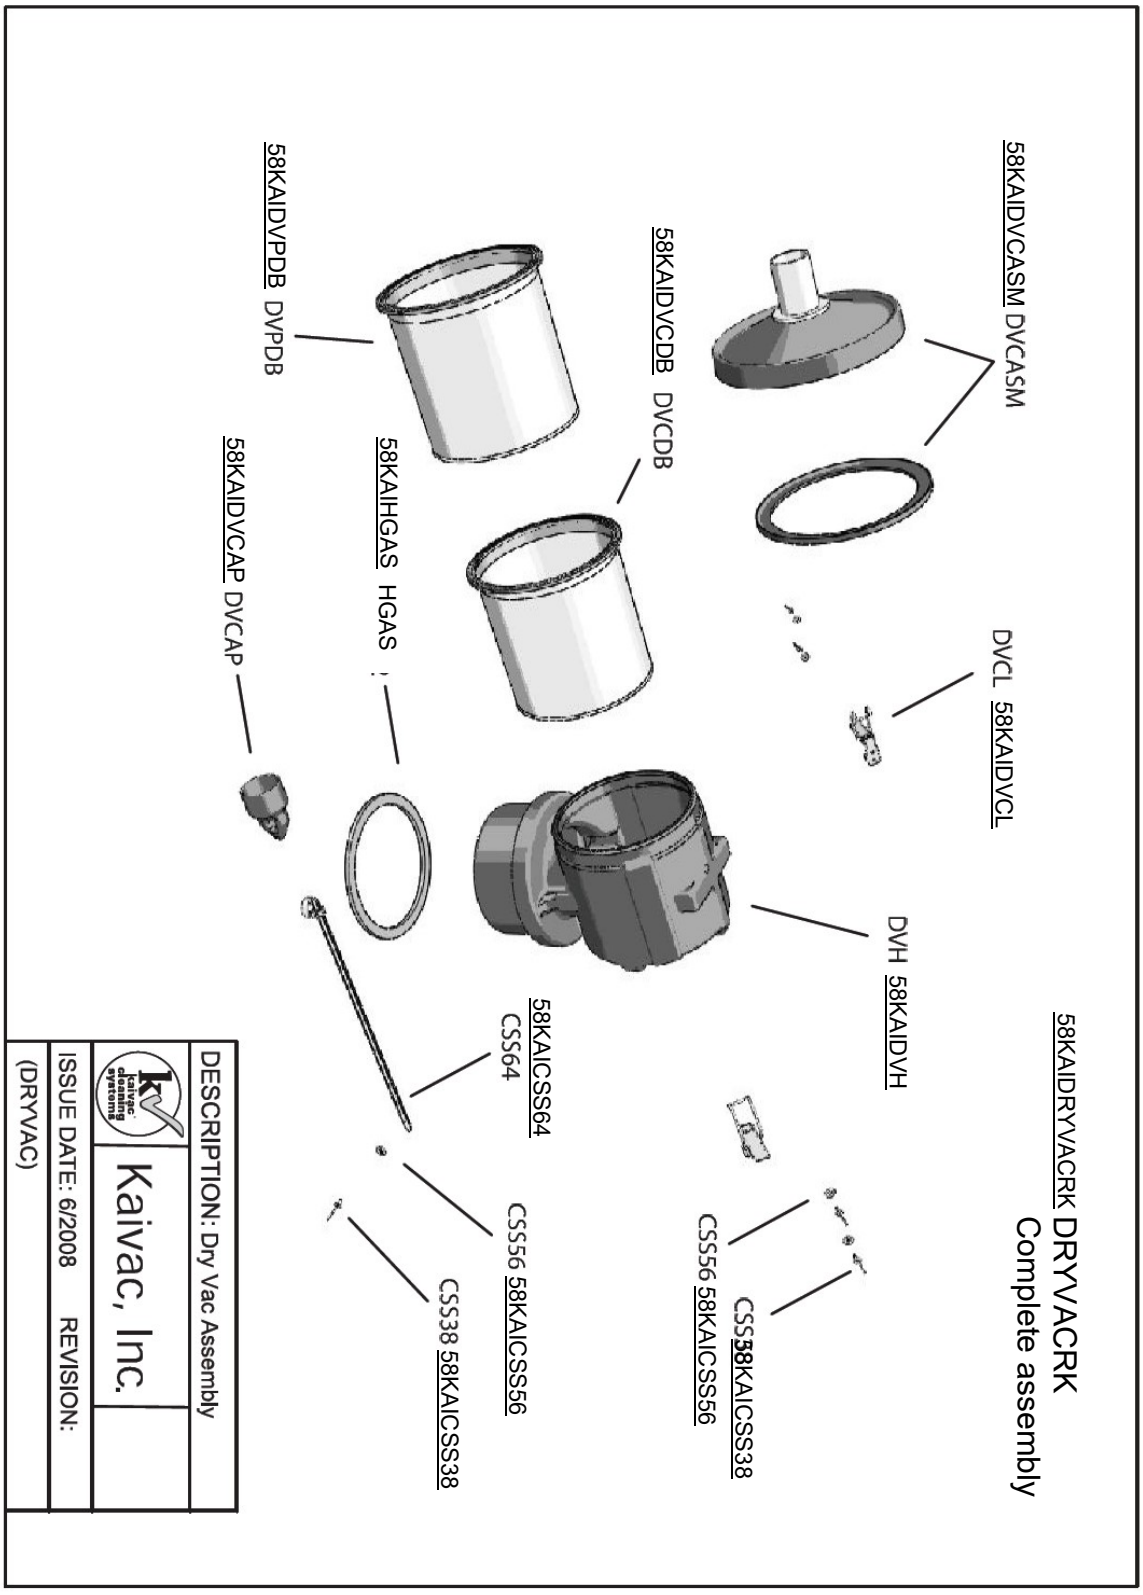

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.5 PARTS LIST

WAXIE Item #	PART NUMBER - DESCRIPTION	QTY
	WATER TANK ASSEMBLY (WTA12BKW)	1
58KAIWTA12BKW	WTA12BKW - WTA12BKW - WATER TANK ASSEM BLACK WAXIE	1
58KAIWTBK12	WTBK12 - WATER TANK BLACK 12 LBS 1200 S ASSEM	1
58KAICPS20	CPS20 - 3/8 NPT X 1/2 BRASS HOSE BARB	1
58KAICSS142	CSS142 - 3/8 INCH BRASS HOSE BARB	1
58KAIMFILT	MFILT - MUSHROOM FILTER	1
58KAILID4	LID4 - LID WITH TETHER 4 1/4 IN	1
58KAICSS17A	CSS17A - 8 SST SCREW 3/4	4
58KAICSS11	CSS11 - NO 10 X 3/4 SELF DRILLING	1
58KAILCST4	LCST4 - 4 TOTAL LOCK CASTER	2
58KAICSS133	CSS133 - 5/16 SPLIT LOCK WASHER 300 SS	8
58KAICSS132	CSS132 - 5/16-18X1 BUTTON HEAD	8
58KAIFLAGLAB	FLAGLAB - ASSEMBLED IN AMERICA LABEL	1
58KAICSS14	CSS14 - 13 CLAMP , FOR TOOLS	1
58KAICSS17	CSS17 - NO 8 FLAT HEAD SQUARE SCREW	2
	VAC TANK ASSEMBLY ((VTA12WX)	
	VTA12WX - VTA12WX - VAC TANK ASSEMBLY 12 LB TANK WAXIE	1
58KAIVTY135	VTY135 - VAC TANK YELLOW 13.5 LBS 1200 S ASSEM	1
58KAIKFLOAT	KZFLOAT - FLOAT SHUT OFF	1
58KAICSS173	CSS173 - 1 1/4 NPT X 1 1/2 HOSE ADAPTER	1
58KAIDH25	DH25 - 26" X 1.5" DUMP HOSE 2" CUFF	1
58KAICSS03	CSS03 - 1 9/16 - 2 1/2 HOSE CLAMP	1
58KAICSS14	CSS14 - 13 CLAMP , FOR TOOLS	2
58KAICSS17	CSS17 - NO 8 FLAT HEAD SQUARE SCREW	4
58KAISUBSS9	SUBSS9 - 9 IN. SNAP AND STRAP	2
58KAISUBSS7	SUBSS7 - 7 IN SNAP AND STRAP	1
58KAICSS20	CSS20 - SNAP STUD	5
58KAICSS11	CSS11 - NO 10 X 3/4 SELF DRILLING	3
58KAICSS91	CSS91 - 3/8 X 2 1/4 BOLT	2
58KAIKMB16	KMB16 - 3/8 SST FLAT WASHER	2
58KAICSS58	CSS58 - 3/8 X 16 X 1 SST SCREW	1
58KAICSS48	CSS48 - 3/8 SST LARGE OD WASHER	1
	FIG8LABEL - FIGURE 8 LABEL 1-1/4 X 3-1/4	1
	WXLAB2 - WAXIE NAME LABEL VERSA 2	2

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.5 PARTS LIST

WAXIE Item #	PART NUMBER - DESCRIPTION	QTY
	BLACK BOX ASSEMBLY (BBA1250)	1
58KAIBB10	BB10 - BLACK BOX 1200 S 10 LB ASSEMBLY	1
58KAICSS200	CSS200 - ADHESIVE CABLE CLAMP	2
58KAIAX195	AX195 - AXLE 19.75 X 1/2 CR STEEL	1
58KAIWHL5	WHL5 - 5 X 1 1/2 TPU WHEEL W-1/2 BB	2
58KAICSS40	CSS40 - 1/2 DIA WASHERS	2
58KAICSS72	CSS72 - COTTER PIN 1/8 DIA X 11/4 LG	2
58KAICSS01	CSS01 - 1/2 IN PUSH CAP NUT	2
58KAIVMA1200	VMA1200—VAC MOTOR ASY (110V)	1
58KAIPA1250	PA1250 - PUMP ASSEM FOR KV1250	1
58KAICSS07	CSS07 - 5/16-18 X 1 HEX HEAD	4
58KAICSS136	CSS136 - 6 NATURAL CABLE TIE	1
58KAICSS175	CSS175 - 3/4 ID X 1 3/8 OD GROMMET	1
58KAICSS130	CSS130 - RUBBER CUSHIONED STEEL LOOP	1
58KAICSS174	CSS174 - 1/4-20 X 5/8 MACHINE SCREW SS	1
58KAICSS101	CSS101 - ACORN NUT 1/4 20	1
580053	PCKV1 - 22 IN. POWER CORD WITH MOLDED	1
58KAICSS141	CSS141 - 3/8 ID X 7/8 OD RUBBER GROMMET	1
58KAICPS75	CPS75 - CABLE CLAMP FOR EXT. CORD	2
58KAICSS11	CSS11 - NO 10 X 3/4 SELF DRILLING	2
58KAICSS17A	CSS17A - 8 SST SCREW 3/4	2
58KAIHEPAHA2	HEPAHA2 - HEPA HOUSING ASSEMBLY	1
58KAIHEPALAB	HEPALAB - HEPA WARNING LABEL	1
580057	VA2W - VALVE ASSEM 2 WAY FOR KV1250	1
58KAISPA1250	SPA1250 - SWITCH PANEL ASSEM FOR KV1250	1
58KAICSS17A	CSS17A - 8 SST SCREW 3/4	6
580043	CPS12JQC - QUICK CONNECT INJECTOR	1
58KAICSS21F	CSS21F - SNAP GRIP HOSE CLAMP SIZE C	1
58KAICSS39	CSS39 - 1 1/16 - 2 HOSE CLAMP	1
58KAISP1250	SP1250 - SERIAL PLATE FOR KV1250	1
58KAISERIALLABEL	SERIALLABEL - SERIAL NUMBER LABEL	2
58KAINFSIL	NFSIL - NFSI LABEL	1
58KAICSS308	CSS308 - 1200 BLACK BOX HOSE HOOK	1
58KAICSS48	CSS48 - 3/8 SST LARGE OD WASHER	1
58KAICSS54	CSS54 - 3/8 HEX NUT	1
58KAICSS127	CSS127 - QUICK DISCONNECT TERMINAL	1
58KAIOMLAB2	OMLAB2 - OMNIFLEX MAINTENANCE LABEL BLADES	1
58KAIVLJHA	VAC LID JUG HOLDER ASSEM (VLJHA)	1
58KAIVLJH	VLJH - VAC LID , JUG HOLDER	1
58KAIHGAS	HGAS - HEPA BLOW COVER GASKET	1

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.5 PARTS LIST

WAXIE Item #	PART NUMBER - DESCRIPTION	QTY
58KAIPA1250	1250 PUMP ASSEMBLY (PA1250 (110V)	1
58KAIWL1250	WL1250 - WATER LINE FOR KV1250	1
58KAIRL1750	RL1750 - RETURN LINE FOR 1750	1
58KAICSS08	CSS08 - 5/16-18 U-NUT	2
58KAIJWW	JWW - JUMPER WIRE WHITE 12 IN	1
58KAIJWB	JWB - JUMPER WIRE BLACK 12 IN	1
58KAICSS127	CSS127 - QUICK DISCONNECT TERMINAL	1
58KAICSS64	CSS64 - TIE WRAP FOR FILTERS	1
58KAICPS10	CPS10 - 7/16 - 25/32 HOSE CLAMP	2
58KAIVMA1200	VAC MOTOR ASSEMBLY (VMA1200)(110V)	1
580050	CVM1 - MOTOR FOR BUILDS--REPLACEMENTS-USE CVM1R	1
58KAICSS28	CSS28 - TREMCO CLEAR RTV SILICONE SEALANT	0.01
58KAICES24	CES24 - 16 GAUGE BLACK WIRE	0.5
58KAICSS127	CSS127 - QUICK DISCONNECT TERMINAL	1
58KAICES27	CES27 - 16-14 GAUGE BUTT SPLICES	1
58KAIHFH16	HFH16 - HEPA FILTER HOSE 16 IN FOR	1
58KAICSS39	CSS39 - 1 1/16 - 2 HOSE CLAMP	1
58CSS11	CSS11 - NO 10 X 3/4 SELF DRILLING	2
58KAIVBRAK	VBRAK - VAC MOTOR BRACKET KV1200	1
58KAICSS44	CSS44 - 1/4 FLAT WASHER	2
58KAICSS27	CSS27 - 1/4 NYLOC NUT	2
58KAICSS203	CSS203 - HEX HEAD BOLT 1/4 20 X 1 1/4	2
58KAICSS08	CSS08 - 5/16-18 U-NUT	2
58KAIVMH27	VMH27 - VAC MOTOR HOSE NEW	1
	VALVE ASSEM 2 WAY FOR KV1250 (VA2W)	
58KAICPS43A	CPS43A - 2 WAY BRASS VALVE VITON SEALS	1
58KAICPS68	CPS68 - 90 DEG. 1/8 NPT MALE X	2
58KAICPS65	CPS65 - 1/2 IN CLAMP	1
58KAICSS21F	CSS21F - SNAP GRIP HOSE CLAMP SIZE C	1
58KAISPH18	SPH18 - 2 WAY VALVE HOSE FOR KV1250	1
580042	SPH24 - ELEC BOX CHEMICAL HOSE 24 IN	1

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.5 PARTS LIST

WAXIE Item #	PART NUMBER - DESCRIPTION	QTY
58KAISPA1250	1200 SERIES SWITCH PANEL ASSEMBLY (SPA1250)	1
58KAIHMETER	HMETER - SNAP IN DIGITAL HOUR METER	1
58KAIJWB5	JWB5 - JUMPER WIRE BLACK 5 IN	1
58KAICSS123	CSS123 - QUICK CONNECT PIGGY BACK TERM	1
58KAISPLSSB1200	SPLSSB1200 - SWITCH PLATE SS W/ BREAKER	1
58KAI15ACBS	15ACBS - 15 AMP CIRCUIT BREAKER SWITCH	1
58KAI5ACBS	5ACBS - 5 AMP CIRCUIT BREAKER SWITCH	1
	STANDARD ACCESSORIES 1200 SERIES	
58KAIBPLATE1200	BPLATE1200 - BOTTOM PLATE FOR 1200 SERIES	1
58KAICSS88	CSS88 - 1/4-20 X 3/4 SST SCREW	4
58KAICSS44	CSS44 - 1/4 FLAT WASHER	4
58KAICSS156	CSS156 - 3/8 X 3/4 T THUMB SCREW YELLOW	3
58KAICSS48	CSS48 - 3/8 SST LARGE OD WASHER	3
58KAICPS65	CPS65 - 1/2 IN CLAMP	1
58KAIGFCI25	GFCI25 - GFCI 25 FT (110V ONLY)	1
58KAIPH45	PH45 - PRESSURE HOSE ASSEM 45 FT	1
580049	SUBGAKW - PRESSURE GUN GREEN DOT (110V)	1
58KAIMTIPSNEW	MTIPSNEW - METERING TIP PACK	1
58KAICHCAPA	CHCAPA - CHEM CAP W/SAFETY CHECK VALVE AND SCREEN	1
58KAICHCAPWAX	CHCAPWAX - WAXIE CHEMICAL CAP	2
58KAICPS65	12WACC - 1250W ACCESSORY KIT WAXIE	1
58KAI1200BX1	1200BX1 - TOP BOX FOR KV1200 UNITS	1
58KAI1200BX2	1200BX2 - BOTTOM BOX FOR KV1200 UNITS	1
58KAIFH6FT	FH6FT - FILL HOSE 6 FT	1
58KAICSS114	CSS114 - NYLON SNAP GRIP CLAMP SIZE F	1

© 2019 WAXIE Sanitary Supply. All Rights Reserved.

3.5 PARTS LIST

WAXIE Item #	PART NUMBER - DESCRIPTION	QTY
	12WACC - 1250W ACCESSORY KIT WAXIE	1
58KAIVHST45	VHST45 - 45 FT STRETCH HOSE 5 TO 1 RATIO	1
58KAIDRWED	DRWED - DOOR WEDGIE	1
58KAITBAG	TBAG - TOTE BAG	1
58KAIOFVWGB	OFVWGB - VAC WAND W/CLIP, STRAP & GROUT-BRUSH	1
58KAIVBRUSH	VBRUSH - SQUEEGEE HEAD BRUSH COMPLETE	1
580044	CVS12S - 14.5 SQUEEGEE HEAD WITH SS WHEELS	1
58KAICVS13	CVS13 - BLOW NOZZLE	1
58KAICAA06	CAA06 - WINDOW SQUEEGEE COMPLETE	1
58KAICVS14	CVS14 - KAIDRAIN GULPER TOOL	1
58KAISUBBLHSST	SUBBLHSST - 33 FT BLOW HOSE	1
58QS12WX	QS12WX - QUICK START CD 1250 WAXIE	1
58KAIM1250W	M1250W - MANUAL FOR KV1250W - WAXIE	1
58KAIKTDVD	KTDVD - KAITUTOR TRAINING DVD DISK	1
58KAIFGHA	FGHA - FAUCET TO GARDEN HOSE ADAPTER	1
58KAIZIP22	ZIP22 - 2X2 ZIP BAG 2 MIL	1
58KAIPLCRD	PLCRD - PLACARD FOR 1200 1700 2100 SERIES UNITS	1
58KAISTF	STF - SMART TOWEL FLYER	1
58KAIMFTG	MFTG - MFIBER SMART TOWEL YELLOW 5/PK	0.2
58KAI12ACCBX	12ACCBX - 2524 1/4 X 20 1/4 X 6 1200 ACCESSORY BOX	1

Corporate Headquarters | 9353 Waxie Way | San Diego, CA 92123 | (800) 995-4466 | **www.waxie.com**

© 2019 WAXIE Sanitary Supply. All Rights Reserved.